


167 WATT

POWERFUL. ATTRACTIVE. RELIABLE.

MULTI-CRYSTAL SILICON PHOTOVOLTAIC MODULE WITH 167W MAXIMUM POWER


Designed specifically for peak roofs, Sharp's ND-167U3 photovoltaic modules offer industry-leading performance and aesthetics. These residential modules give the clean, attractive appearance of a high-tech skylight while the black anodized aluminum frames and trim strips blend beautifully with the home's exterior. Perfected by Sharp's 45 years of research and development, these modules allow for maximum usable power. An anti-reflective coating provides a uniform blue color and increases light absorption. Sharp's ND-167U3 modules are a breakthrough in technology and aesthetics.

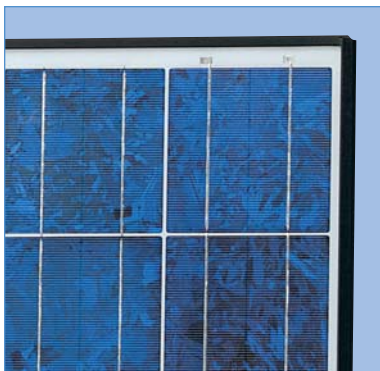

The laminated glass module is glazed into a high torsion black anodized aluminum frame.



Sharp's residential modules with black frames and trim strips are ideal for peak roofs, and allow for the seamless integration of the system into the home's design.

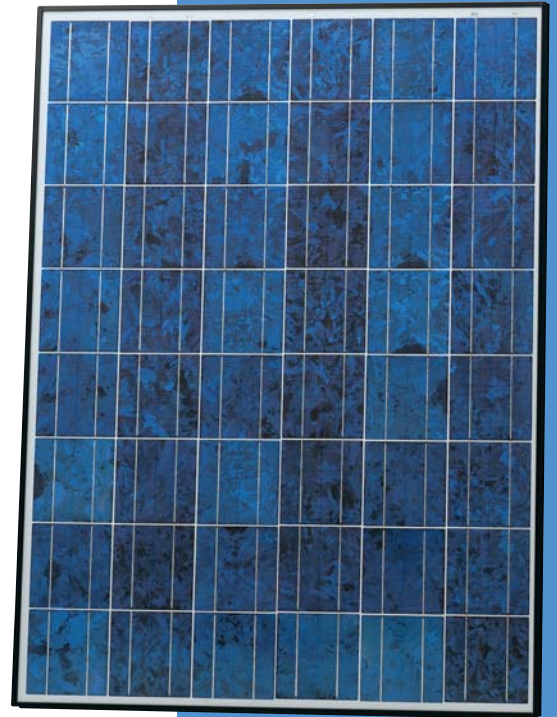

FEATURES

- High-power module (167W) using 48 square multi-crystal silicon solar cells with 12.7% module conversion efficiency
- Bypass diodes minimize the power drop caused by shade
- Water white, tempered glass, EVA laminate, and a weather-proof film yield long-life modules while enhancing cell performance
- Nominal 16 VDC output is an ideal match for the Sharp multi-string inverter
- Manufactured in ISO 9001 certified facilities
- 25-year limited warranty on power output (see dealer for details)
- UL Listings: UL 1703, cUL

ELECTRICAL CHARACTERISTICS

Cell	Multi-crystal silicon
No. of Cells and Connections	48 in series
Open Circuit Voltage (Voc)*	29.0V
Maximum Power Voltage (Vpm)*	23.5V
Short Circuit Current (Isc)*	7.9A
Maximum Power Current (Ipm)*	7.1A
Maximum Power (Pm)*	167W
Minimum Power (Pm)*	150.3W
Module Efficiency (η _m)	12.7%
Maximum System Voltage	600VDC
Series Fuse Rating	15A
Type of Output Terminal	Lead Wire with MC Connector


MECHANICAL CHARACTERISTICS

Dimensions (A x B x C below)	51.9 x 39.1 x 1.8" / 1318 x 994 x 46mm
Weight	36.4lbs / 16.5kg
Packing Configuration	2 pcs per carton
Size of Carton	56.3 x 42.5 x 5.1" / 1430 x 1080 x 130mm


ABSOLUTE MAXIMUM RATINGS

Operating Temperature	-40 to 194°F / -40 to +90°C
Storage Temperature	-40 to 194°F / -40 to +90°C

IV CURVES

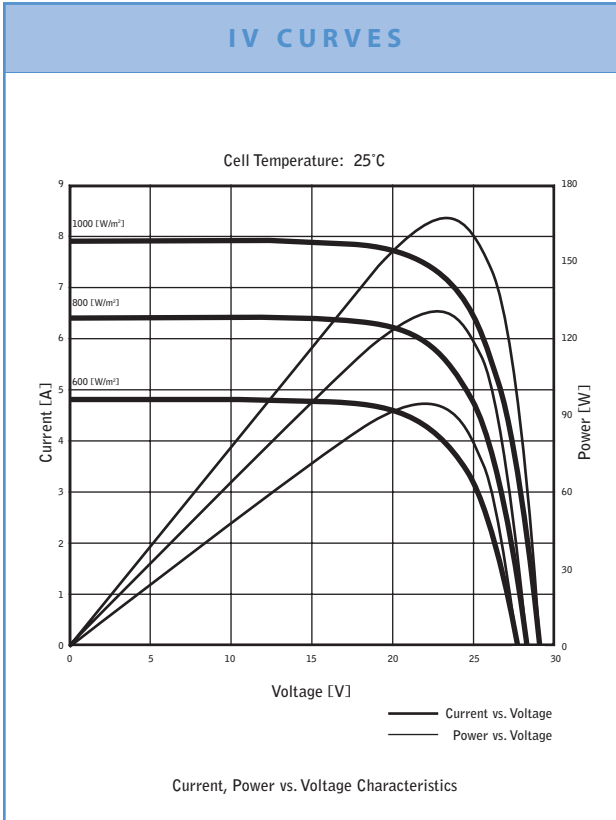

DIMENSIONS

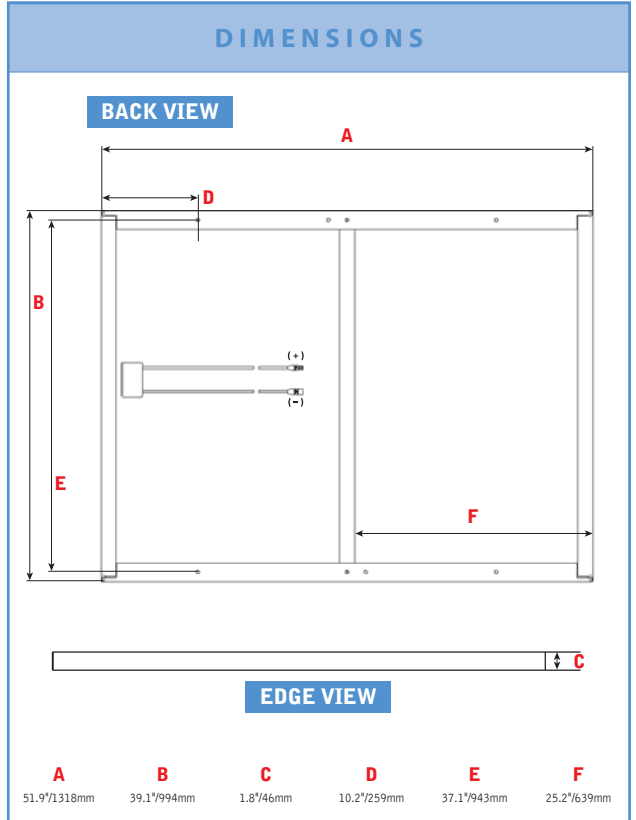

Specifications are subject to change without notice.

* (STC) Standard Test Conditions: 25°C, 1 kW/m², AM 1.5

In the absence of confirmation by product manuals, Sharp takes no responsibility for any defects that may occur in equipment using any Sharp devices. Contact Sharp to obtain the latest product manuals before using any Sharp device.

