



Shanghai Solar Energy S&T Co.,Ltd.

About Shanghai Solar Energy S&T Co.,Ltd.

Officially registered in January 2000, Shanghai Solar Energy S&T Co.,Ltd.
The company has built more than 300 photovoltaic power stations

Space Photovoltaic Industry Chain

As an important unit of Space photovoltaic industry chain,
relying on aerospace technology advantage.

Competitive Strength

SSEC has abundant experience in photovoltaic production
It has researched and developed large area high-power BIPV modules.

Features

- Unique design of the aluminum alloy frame
 - Complete & Compact seal design
 - High light transmission glass
- These details to ensure the high quality of our products.

Corporate Culture

Integrity , Innovation , Harmony.

Warranties

- 5-year limited product warranty*
- Limited power warranty*: 10 years at 90% of the nominal rated power output, 25 years at 80% of the nominal rated power output

Qualifications and Certificates


IEC 61215 Edition 2, IEC 61730 Class A, CE, ISO 9001,ISO14000,ISO18001

*Design and specifications are subject to change without notice.

Add: No.555 Shen NanRoad, Xin Zhuang Industrial Zone, Shanghai, P.R. China, 201108

Tel: 86-21-64895099 Fax: 86-21-64898715

http: //www.ssec-solar.com E-mail: webmaster@ssec-solar.com

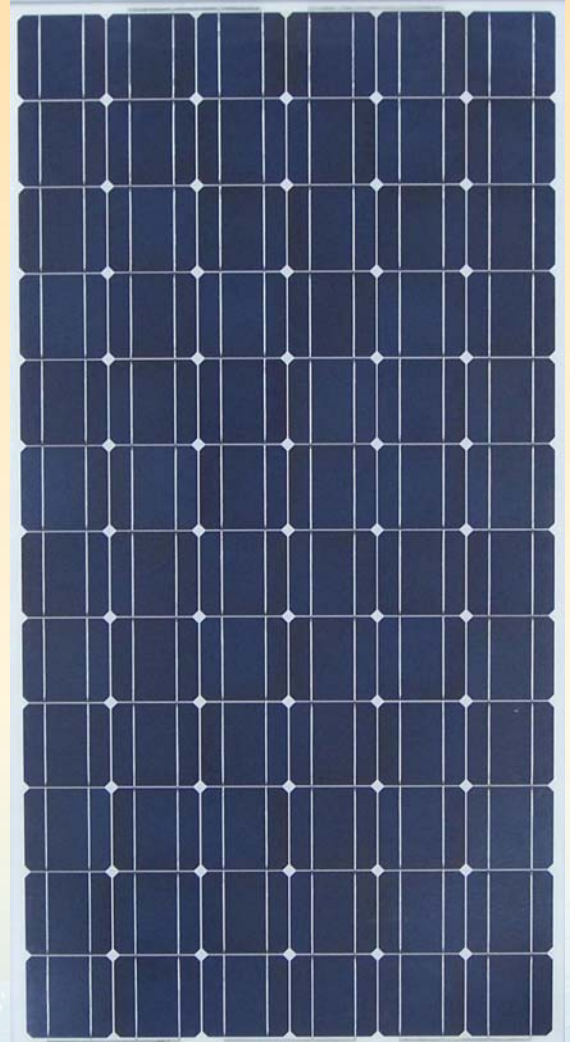

- Qualified, IEC 61215
- Safety tested, IEC 61730
- Periodic Inspection





STC	S-270C	S-275C	S-280C	S-285C	S-290C
Nominal peak power	270W	275W	280W	285W	290W
Open circuit voltage	44.5V	44.7V	44.9V	45.1V	45.3V
Max. power voltage	35.1V	35.6V	36.1V	36.5V	36.9V
Short circuit current	8.20A	8.27A	8.33A	8.42A	8.51A
Max. power current	7.69A	7.73A	7.76A	7.81A	7.86A
module efficiency	13.9%	14.2%	14.4%	14.7%	15.0%
Power output tolerances	±3%				
Max. system voltage	1,000 VDC				
Max.series fuse rating	15A				
Operating temperature	- 40°C to + 85°C				
*Electrical parameters at STC (1,000 W/m ² , 25°C, AM 1.5 according to EN 60904-3)					


NOCT	S-270C	S-275C	S-280C	S-285C	S-290C
Nominal peak power	192W	196W	200W	203W	207W
Open circuit voltage	40.5V	40.7V	40.9V	41.0V	41.2V
Max. power voltage	30.9V	31.3V	31.8V	32.1V	32.5V
Short circuit current	6.64A	6.70A	6.75A	6.82A	6.89A
Max. power current	6.23A	6.26A	6.29A	6.33A	6.37A
NOCT	46°C ± 2°C				
*Electrical parameters at NOCT (800 W/m ² , 20°C, AM 1.5 according to EN 60904-3)					

Temperature coefficients		
γPm	-0.47%/K	
αIsc	0.056%/K	
βVoc	-0.34%/K	

Mechanical parameters	
Module dimension	1956*992*50(mm)
Weight	27.0kg
Max. wind Load	2400pa
Max. snow Load	5400pa
Cell dimension	156*156
Cell type	72(6*12) / monocrystalline
Packing method	330pcs/40'

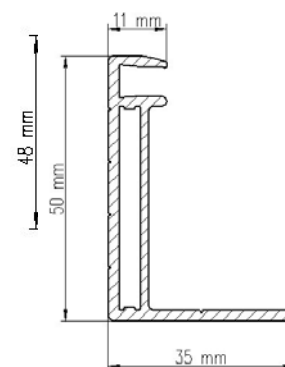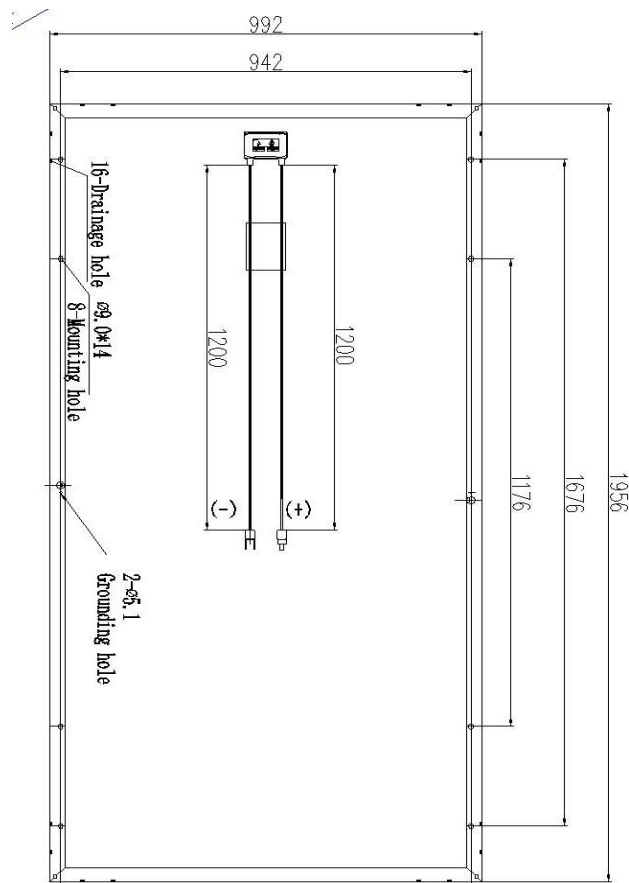

Current, power VS voltage characteristics (solar irradiant: 100%, 80%, 50%)

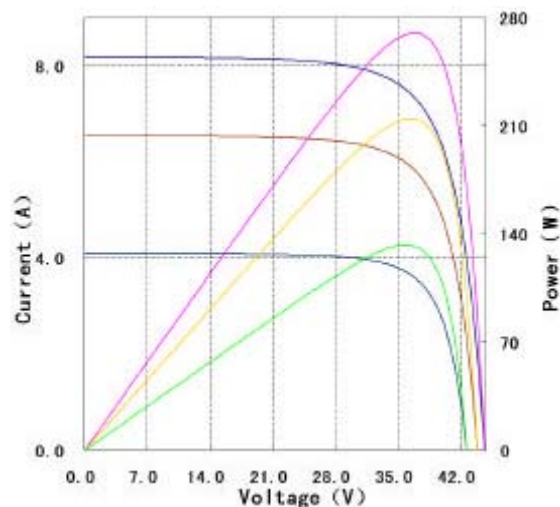

*Design and specifications are subject to change without notice.

Add: No.555 Shen NanRoad, Xin Zhuang Industrial Zone, Shanghai, P.R. China, 201108

Tel: 86-21-64895099 Fax: 86-21-64898715

http: //www.ssec-solar.com E-mail: webmaster@ssec-solar.com