



## AS-6P24 Amerisolar

Amerisolar's photovoltaic modules are designed for large-scale electrical power requirements. With a 25 year warranty, the AS-6P24 offers high-power and reliable performance for solar projects, both on- and off-grid.

- Solar Cells: High efficiency solar cells ensure high performance of the solar module and create maximum power output.
- Low-Iron Tempered Glass: High transmittance glass with an Anti-reflective coating increase the power output and mechanical strength of the solar module.
- Aluminum Frame: Screw-less corner joints provide superior rigidity. Six predrilled mounting holes ease installation.
- Superior Junction Box: Multi function junction box with water proof capabilities.
- Long Lifespan: ≥ 25Years.
- Tolerance: ±3%.
- High impact resistance affords superior performance during severe weather – high wind, driving rain, heavy snow and hail.
- Moisture proof and corrosion-resistant.
- Carries certificates from International Agencies: CE, TUV, UL, IEC, MCS and Korea Certificate.



**WARRANTY**  
 - Product: 10 years  
 - Power Output:  
 90%---10 years  
 80%---25 years

### Electrical Characteristics

*P<sub>max</sub>, V<sub>oc</sub>, I<sub>sc</sub>, V<sub>mp</sub> and I<sub>mp</sub> at STC (1000W/m<sup>2</sup>, 25°C, AM 1.5):*

	165W	170W	175W	180W	185W	190W	195W	200W
Maximum Power (P <sub>max</sub> )	165W	170W	175W	180W	185W	190W	195W	200W
Open Circuit Voltage (V <sub>oc</sub> )	29.0V	29.2V	29.4V	29.6V	29.8V	29.8V	30.0	30.2
Short Circuit Current (I <sub>sc</sub> )	7.60A	7.72A	7.82A	7.95A	8.08A	8.20A	8.30	8.45
Maximum Power Voltage (V <sub>mp</sub> )	23.8V	24.0V	24.2V	24.4V	24.7V	25.0V	25.2	25.5
Maximum Power Current (I <sub>mp</sub> )	6.95A	7.10A	7.25A	7.38A	7.50A	7.62A	7.75	7.85

### Temperature Coefficients

Temperature Coefficients of Pm	-0.47 %/°C
Temperature Coefficients of Voc	-0.38 %/°C
Temperature Coefficients of Isc	+0.04 %/°C
Temperature Coefficients of Im	+0.04 %/°C
Temperature Coefficients of Vm	-0.38 %/°C

### Absolute Maximum Limits

Maximum System Voltage	600V DC
Module Operating Temperature	-40°C to +85°C
Noct (DEGC.)	47°C±2°C



**Passionately  
 committed to  
 delivering innovative  
 energy solutions**





**Mechanical Characteristics**

Cell Technology	156mmx156mm Poly-crystal silicon
Number of Cells (Pcs)	48 (6x8)
Dimensions	1316mmx992mmx40mm
Weight	15.5kg
Frame	Anodized Aluminium Alloy
Length of Cables (mm)	1000mm
Allowable Hail Load	227g steel ball dropped from 1m height
Surface Maximum Load Capacity	60m/s Wind or 540kg/m <sup>2</sup>


**Basic Dimensions**

ALL DIMENSIONS IN mm

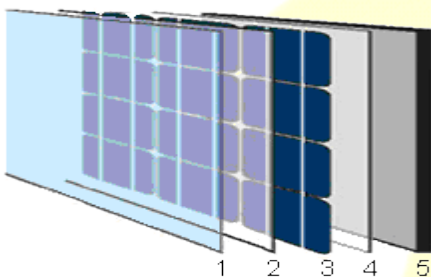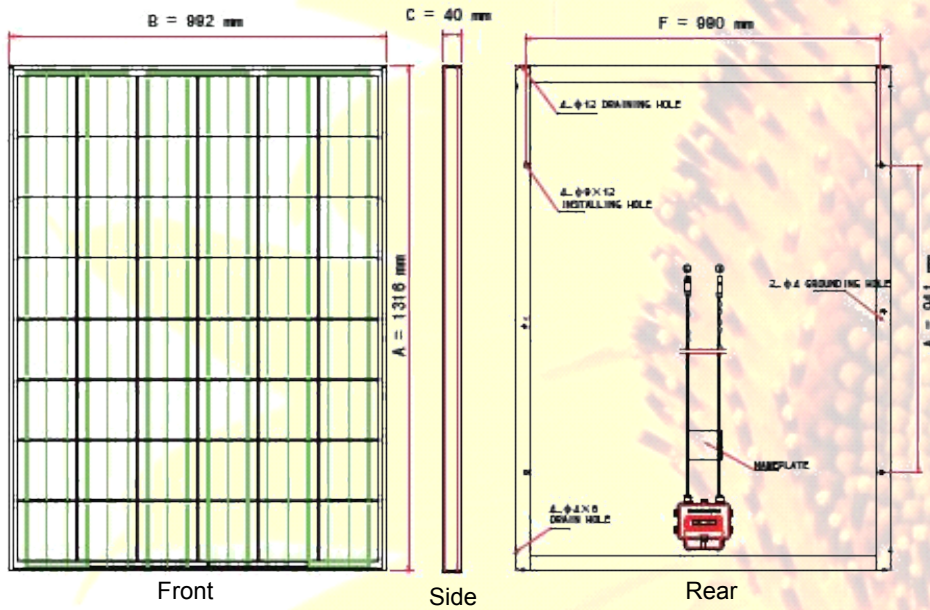


1. Front: tempered solar glass 3.2mm
2. EVA
3. 48 high efficiency solar cells 156mm X 156mm
4. EVA
5. Rear: laminate (weatherproof and waterproof)


**I-V curves**

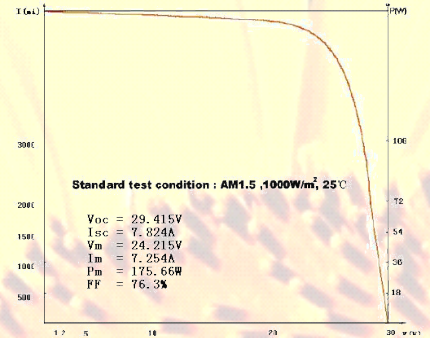

**Module at STC**

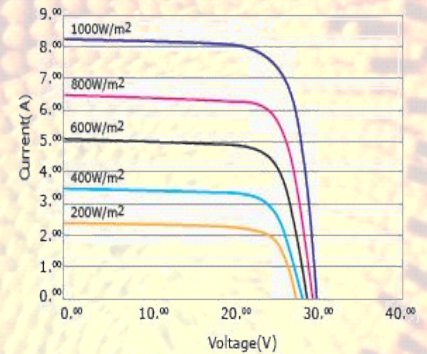

**Various Irradiance Levels**

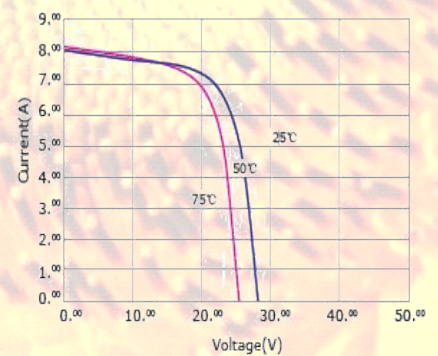

**Various Temperatures**

**Worldwide Energy and Manufacturing USA, Inc.**

408 N. Canal Street Unit A & B, South San Francisco, CA 94080

Tel : +1-650-794-9888

Fax : +1-650-794-9878

[Http://www.wwmusa.com](http://www.wwmusa.com)

E-mail : [solarsales@wwmusa.com](mailto:solarsales@wwmusa.com)